



215-2000 Full range drive unit – 20W / 99dB / 4Ω

SPECIFICATIONS

Efficiency: 99dB
Frequency response: 50Hz-20KHz
Impedance: 4Ω
Power max. RMS: 20W

Suspension: 5 paper pleats
Linear excursion: 10mm
Magnet Alnico: 3.5 Kg
Magnetic field: 2.1 T
Diamètre HP : 224/237mm
Frame thickness: Alu 10mm
Diameter fixation: 227mm
Diameter drilling holes: 212mm
Depth HP: 147mm

Fs : 47Hz
Re : 4Ω
Qts : 0.23
Qe : 0.24
Qm : 8
Vas : 121 L
Bl : 6.5
Cms : 1
Mms : 7 g
Sd : 283 cm²

EAN Code: 0660042796776

Dimensions & Weight PRODUCT
 Ø 237 x H 147mm
 3.5 Kg

Dimensions (LxHxP) & Weight PACKAGING
 235 x 235 x 195mm
 3.85 Kg



The new team, with the affectionate but rigorous of old, endowed with an invaluable knowledge to make, continuous assistance hold up very high the banner of the "HIGH FRENCH FIDELITE". In the line of famous T 215 rtf 64, reference impossible to circumvent of years 50-80, we work to perpetuate and make evolve this standard of quality of sound reproduction. Loudspeakers SUPRAVOX are divided into 3 ranges, the series Classic (ferrite), the series 2000 (Alnico) and the series EXC (electro magnet) ..


Each loudspeakers is measured one by one, provided with its sheet of Thiele and Small parameters. According to those, they are matched to give you 2 loudspeakers works absolutely in the same way.

2000 Series


Driver units SUPRAVOX series 2000 are been driven by engine alnico.

The 215-2000 is a full range speaker and high efficiency driver unit. No compromise for this loudspeaker of exception: hyperbolic cone paper without bicone, suspension with the max. displacement of 2cm, Alnico driving block (3.5Kg) and pure iron core to obtain 21000 Gauss of magnetic field.


The 215-2000 astonishes by its precision and its clearness in the medium, by the presence without aggressiveness of high frequencies, by the speed and the clearness of its low register, the whole with exceptional dynamics. In column TQWT or in enclosure of back horn type, it justifies its row of ultimate full range loudspeaker.

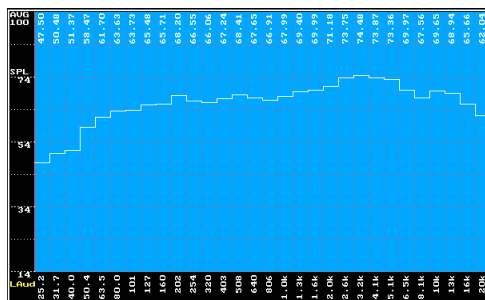


Frequency response in 1/3 octave

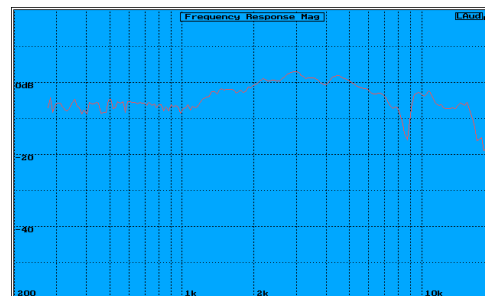

Frequency response 200 Hz to 20 kHz in the axis

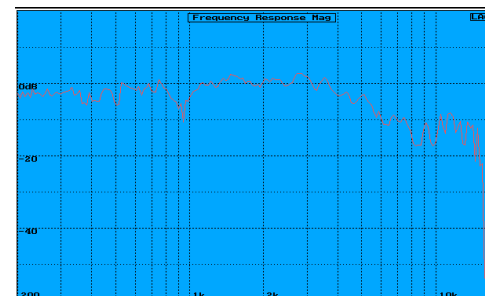

Frequency response 200 Hz to 20 kHz at 30°

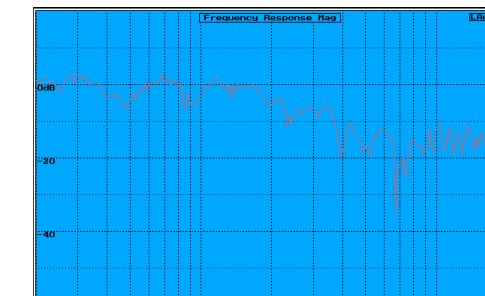

Frequency response 200 Hz to 20 kHz at 60°

