



215 GMF Bass medium drive unit – 40W / 97dB / 8Ω

SPECIFICATIONS

Efficiency: 97dB
 Frequency response: 40Hz-5KHz
 Impedance: 8Ω
 Power max. RMS: 40W

Suspension : 5 paper pleats
 Linear excursion: 10mm
 Magnet diameter: 96mm
 Magnetic field: 1.5 T
 Diameter HP : 224/237mm
 Frame thickness: Alu 10mm
 Diameter fixation: 227mm
 Diameter drilling holes: 212mm
 Depth HP : 110mm

Fs : 45Hz
 Re : 8Ω
 Qts : 0.33
 Qe : 0.35
 Qm : 6
 Vas : 120 L
 Bl : 8.5
 Cms : 1
 Mms : 10 g
 Sd : 285 cm²

EAN Code: 0660042796721

Dimensions & Weight
PRODUCT
 Ø 237 x H 110mm
 3.4 Kg

Dimensions (LxHxP) &
 Weight
PACKAGING
 255 x 240 x 120 mm
 3.6 Kg



The new team, with the affectionate but rigorous of old, endowed with an invaluable knowledge to make, continuous assistance hold up very high the banner of the "HIGH FRENCH FIDELITE". In the line of famous T 215 rtf 64, reference impossible to circumvent of years 50-80, we work to perpetuate and make evolve this standard of quality of sound reproduction. Loudspeakers SUPRAVOX are divided into 3 ranges, the series Classic (ferrite), the series 2000 (Alnico) and the series EXC (electro magnet) ..


Each loudspeakers is measured one by one, provided with its sheet of Thiele and Small parameters. According to those, they are matched to give you 2 loudspeakers works absolutely in the same way.

Classic series


Its objective, to maintain the philosophy of SUPRAVOX ,full range driver units and high efficiency. We work still to widen the useful bandwidth for a highest efficiency possible, while unceasingly improving the definition, the quality and the linearity. Diameter 135 to 380 mm, the audiophile can satisfy its passion.

A bass medim driver with very great dynamic qualities. This driver unit remains easily bafable in Jensen boxes or rather bass-reflex volume.


With its 97 dB/W at 1m of efficiency the bet of the very high efficiency is reached and this with a linear excursion without compression of dynamics (+/- 5mm). The admissible power is the highest of all the 215 Supravox.

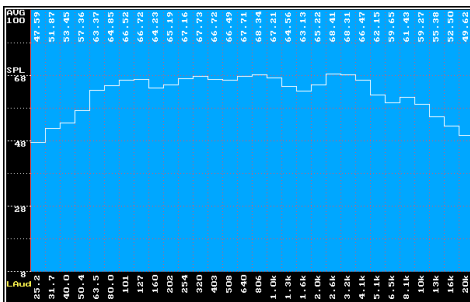


Frequency response in 1/3 octave

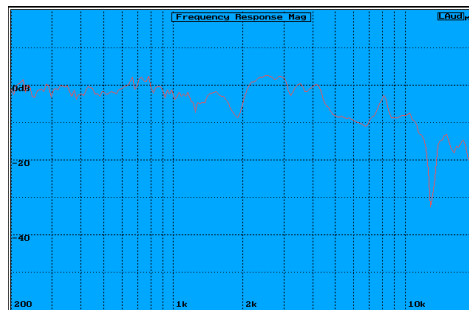

Frequency response 200 Hz to 20 kHz in the axis

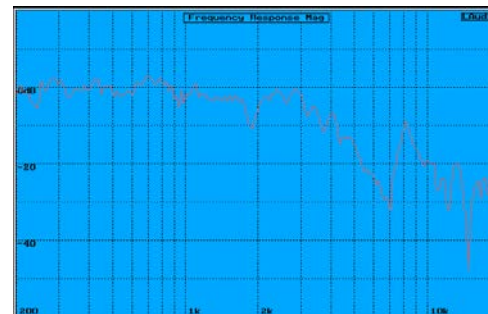

Frequency response 200 Hz to 20 kHz at 30°

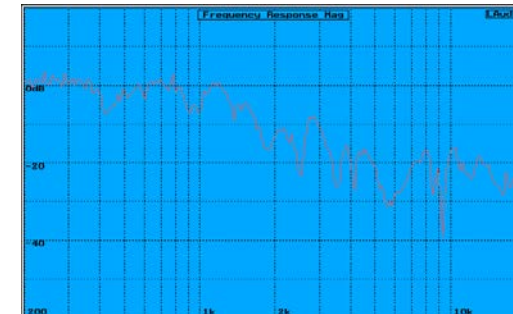

Frequency response 200 Hz to 20 kHz at 60°

