



# 165 GMF Bass-midrange driver - 35W / 96dB / 8Ω

## TECHNICAL DATAS

Parameters 2019, measured according to the AES2-1984-r2003 standard.

**Sensitivity** (2,83V/1m): 96dB  
**Bandwidth:** 60Hz-10KHz  
**Impedance:** 8 Ω  
**Power:** 35 W

**Suspensions:** 5 pleated paper  
**Linear excursion:** 6 mm  
**Magnet diameter:** Ferrite 96mm  
**Magnetic field:** 1,4 T  
**Frame:** Aluminum 10 mm

**Fs:** 64 Hz  
**Re:** 5,5 Ω  
**Qts:** 0,39  
**Qe:** 0,42  
**Qm:** 6,2  
**Vas:** 40 L  
**Bl:** 5,6 Tm  
**Cms:** 1  
**Mms:** 5,5 g  
**Sd:** 165 cm<sup>2</sup>

**Code EAN :** N.C.

### Weight & dimensions

**Ø SPK:** 185mm  
**Ø fixation:** 175mm  
**Ø drilling holes:** 160mm  
**Depth SPK:** 85mm  
**Weight:** NC Kg

### Boxed dimensions(WxHxD) & weight:

NC mm  
NC Kg




Supravox keeps holding high the «HAUTE FIDELITE FRANCAISE» banner. In the heritage of the famous T 215 SRTE, reference impossible to circumvent of years 60's-80's, we work on perpetuating and improving this sound quality standard for your hear benefit.

Each driver is controlled on our CLIO bench, this 100 % production control ensure the best quality to our clients.


### Classic series

Its objective, to maintain the philosophy of SUPRAVOX, full range driver units and high efficiency. We work still to widen the useful bandwidth for a highest efficiency possible, while unceasingly improving the definition, the quality and the linearity. Diameter 135 to 380 mm, the audiophile can satisfy its passion.


This driver unit takes the characteristics of the 165LB, the suppression of the dome makes it possible to release the serious register, the warhead allowing a better spacialisation of the medium. It is supplemented ideally with the TW 2-20.

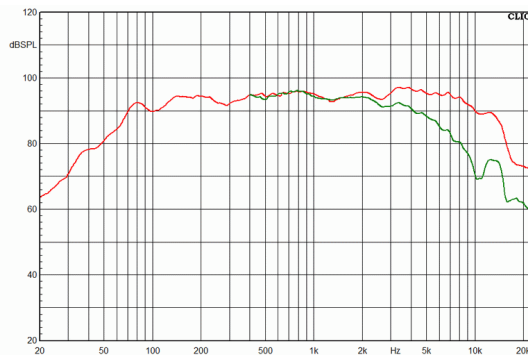

Frequency response in 1/3 octaves, dBspl/1m/2.83V at 0° and 30°

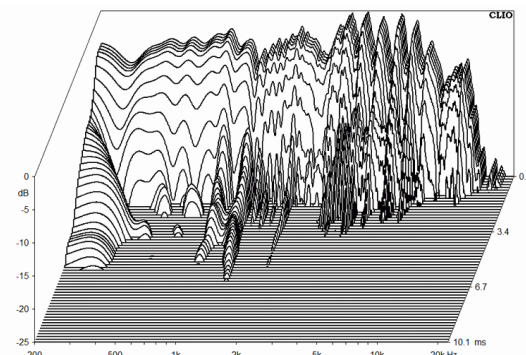

Time depreciation

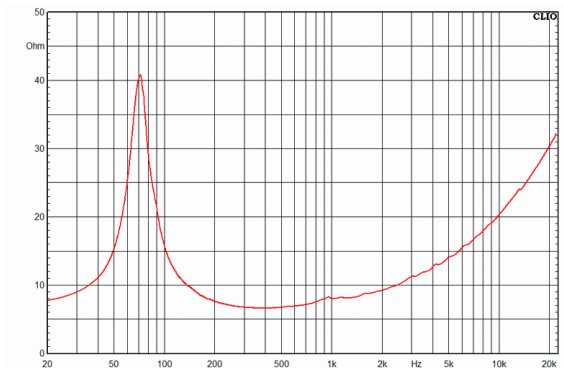

Impedance curve

